

Eco-Story Large Full Cutoff wall pack

Features

- Suitable for WET location/Outdoor
- Full Cutoff and compliant with Dark Sky requirements
- 90-135W power consumption, to replace 250-400W MH
- Lumen output 8500-13000lm, CCT are available at 3500, 4000K and 5000K
- Type III polycarbonate optical lens with UV stabilizers
- 120-277V and 347V
- Built-in UL class 2 driver for optional photocell
- UL/cUL and DLC Listed



Applications

- Security, pathway and perimeter lighting
- Building entryways and walkways



Specification

Specification/ Model	ECOWPF90W50K	ECOWPF95W50K	ECOWPF135W50K	ECOWPF145W50K
Input Power	90W	95W	135W	145W
Lumens output	8500lm	8500lm	13000lm	13000lm
Efficacy	94lm/W	89lm/W	96lm/W	90lm/W
CRI	80			
Color Temperature	5000K			
Input Voltage	120-277V	347V	120-277V	347V
Finish Color	Dark Bronze			
Optical Lens	Polycarbonate (UL Recognized) (f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C			
Mounting	Wall Mounting			
Photocell	120V or 277VAC (UL and CSA listed) 3/4in long threaded nipple,30-45 second time delay, Power Consumption: less than 0.9 watts at 120 VAC			

Ordering Guide


EXAMPLE : ECO WPF 90W 40K D P1

Fixture Type	Power Consumption	Input Voltage	CCT	Finish	Sensor (Option)
WPF Large Full Cutoff Wall Pack	90W 90Watts	27V 120-277V	35K 3500K	D Dark Bronze	P1 120V Photocell
	95W 95Watts	34V 347V	40K 4000K		P2 277V Photocell
	135W 135Watts		50K 5000K		Blank without Photocell
	145W 145Watts				

NOTES: 1. 277V driver operates on 120-277V (50/60 Hz), Specify 120 and 208-277 options only when ordering with photocell.
2. 90W and 135W are limited to 120-277V input only; 95W and 145W are limited to 347V input only.

Dimension


unit: inch/mm

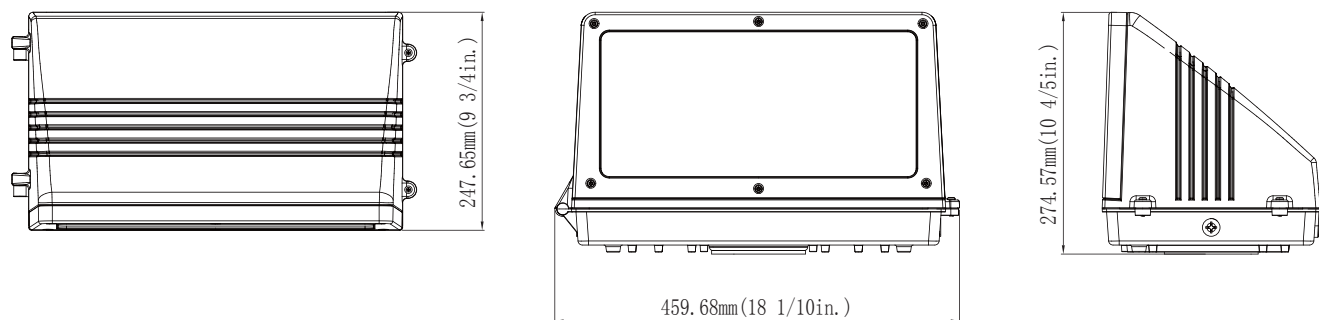


Photometrics

ECOWPF90W40K ECOWPF95W40K

Luminous Intensity Distribution Curve




Illuminance at a Distance




ECOWPF135W40K ECOWPF145W40K

Luminous Intensity Distribution Curve



Illuminance at a Distance



Energy Saving Replacement

ECO-STORY MODEL	Replacing
90W and 95W LED	250W MH
135W and 145W LED	400W MH