

Eco-Story Full cutoff wall pack



Features

- Sealed die-casting profile for outdoor applications
- Available with Type II and Type III photometry
- Head tilts max 20 degree for different lighting purposes
- Replaces a 50-100W halide
- Lumen output from 2000-4400lm with efficacy of 100lm/W
- Built-in UL class 2 driver, with optional photocell
- UL and DLC listed



Applications

- Security, pathway and perimeter lighting
- Building entryways and walkways



Specification

Specification/Model	ECOWPI20W50K	ECOWPI30W50K	ECOWPI40W50K
Input Power	20W	30W	40W
Lumens output	2000lm	3000lm	4400lm
Efficacy	100 lm/W	100 lm/W	110 lm/W
CRI	75		
Color Temperature	5000K		
Input Voltage	120-277VAC	120-277VAC	120-277VAC
Finish Color	Dark Bronze		
Lens	Glass		
Mounting	Fits electrical boxes and wall mounts directly		
Photocell	120/277VAC (UL and CSA listed) 1/2" long threaded nipple, 30-45 second time delay, Power Consumption: less than 0.9 watts at 120 VAC		



Ordering Guide

EXAMPLE : ECO WPI 20W 40K D P1

Lamp Type	Power Consumption	Input Voltage	CCT	Finish	Sensor (Option)
WPI FULL CUTOFF Wall Pack LED Intergrated	20W 20Watts	27V 120-277V	35K 3500K	D Dark Bronze	P1 120V Photocell
	30W 30Watts	34V 300-380V	40K 4000K	B Black	P2 277V Photocell
	40W 40Watts		50K 5000K		P3 347-380V Photocell
			57K 5700K		Blank Without Photocell

Dimension


unit: inch/mm

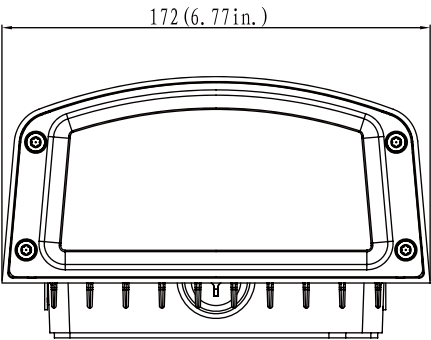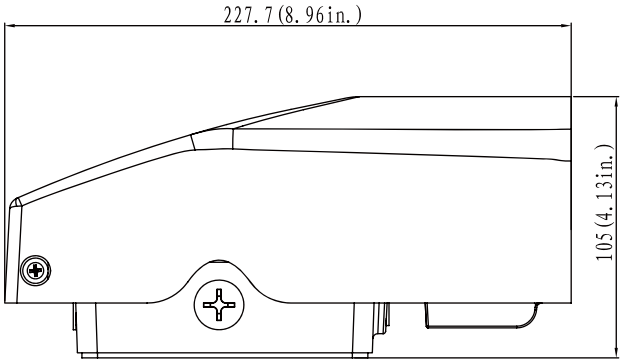


Photometrics

ECOWPI20W40K

Luminous Intensity Distribution Curve




Illuminance at a Distance




ECOWPI30W40K

Luminous Intensity Distribution Curve




Illuminance at a Distance




ECOWPI40W40K

Luminous Intensity Distribution Curve



Illuminance at a Distance



Energy Saving Replacement

Eco-Story Model	Replacing
20W LED	50W HID
30W LED	75W HID
40W LED	100W HID